


# Hampton Thumb Latch, Street Swing

## INSTALLATION INSTRUCTIONS

Please review ALL diagrams and instructions in full prior to beginning installation.  
Use this instruction in place of those inside of the hardware box.

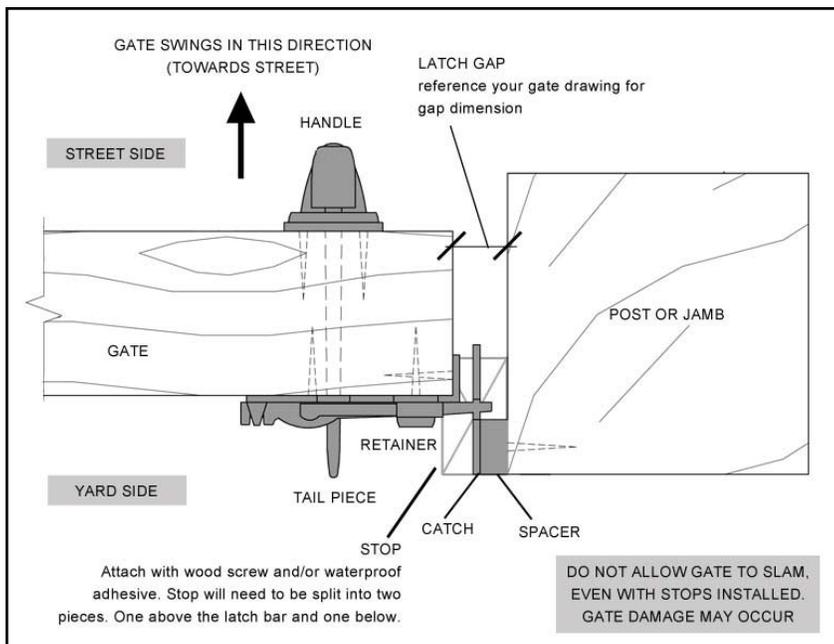

### LATCH INSTALLATION

*Install Latch after gate and hinges are installed.*


1) Place the latch plate on the gate in the desired position. The latch plate acts as a template to mark where to drill through the gate.



2) Use a pencil to trace around the inside of the vertical slot in the latch plate on the gate.

3) Mark a drilling center that is 3/8" above the bottom of the slot marked on the gate and centered between the two sides of the slot. (Center of hole should be 2 1/16" from the edge of the gate) **Always drill from the latch plate side of the gate.**

4) Drill a single 3/4" hole through the gate avoiding excessive break out on the other side. (The entire slot does not have to be drilled out)

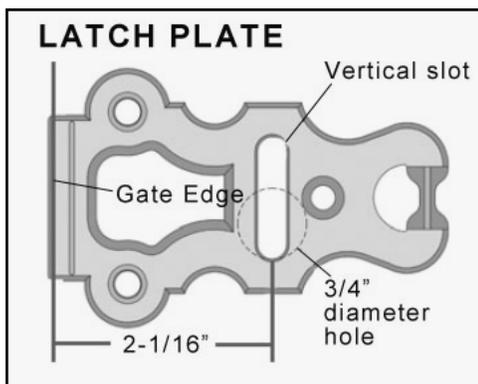

5) Install the latch plate on the gate ensuring the bottom of the slot is level with the bottom of the drilled hole.

6) Install 2 (1.0" x #8) screws in the end of the latch plate into the edge of the gate. Then install 1 (1.0" x #8) into the countersunk hole on the face of the latch plate (Please note: We also recommend that all screws holes are pre-drilled to accept the appropriate size screw).

7) Install latch bar so that the thin end is tucked under the loop in the latch plate. (Start with the bar perpendicular to the plate, tuck the first tooth behind the loop, and drop the latch bar toward the latch plate until it is resting on it and between the two round protrusions on the latch plate)


8) Place the retainer so that the small rectangular protrusion on the back is facing down and is installed below the latch bar. Fasten the retainer to the gate using the 2 (2.0" x # 12) screws provided.

9) Install the thumb bar into the back of the handle by pushing the thumb knob through the handle and rotating it 90 degrees. The two pins on the thumb bar will then sit in the recesses on the back of the handle.

10) Push the curved end of the thumb bar through the hole in the gate so that it extends through the slot in the latch plate underneath the latch bar. Fasten the handle so that the bar is in center of the hole (use 3 (1.25" x #10) screws)

11) Push the gate to the closed position and mark the gate post at the point where the bottom of the latch bar touches the post.

12) Install the catch plate and catch plate spacer on the inside face of the gate post using 2 (1.5" x #8) screws, so that the bottom of the slot is 1/4" below the mark made on the latch post and in a position to stop the gate from travelling at the desired position.

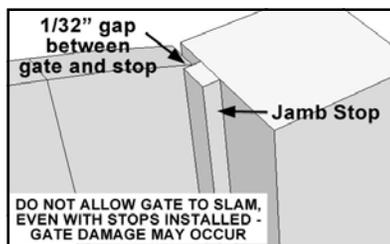

### STOP INSTALLATION

*Failure to install gate stops will void warranties.*

- 1) Cut stop to be at least as long as the gate's edge height. Stop will need to be split into two pieces. One above the latch bar and one below.
- 2) Mount stops to posts (or jambs, if applicable) using screws and/or weatherproof wood glue (such as Titebond III). Position stop with 1/32" gap between face of gate and stop when gate is closed.